

1500, 1600, y 1800 MHz Yagis



DESCRIPTION

- PVC radome antennas.
- High gain Antenna.
- Optimun performance at all band.
- High front to back ratio.
- Heavy duty construction for long life operation.
- Standard femal connector N.
- U-Bolts and clamps included in price.

SPECIFICATIONS


- Impedance 50 Ohms
- Max. Power 50 W
- S.W.R. < 1,5
- Mounting 30-58 mm pipe diameter .
- Polarization Vertical or Horizontal

DESCRIPCIÓN

- Antenas radomizadas en PVC.
- Antena de alta ganancia.
- Optimo rendimiento en gran ancho de banda
- Optima relación Frente-Espalda.
- Antena de gran robustez y durabilidad
- Conector standard N hembra..
- Herrajes incluidos en P.V.P.

ESPECIFICACIONES

- Polarización Vertical u Horizontal
- Impedancia 50 Ohms
- Potencia Máx. 50 Watios
- S.W.R. < 1,5
- Montaje sobre mástil de 30-58 mm de diámetro
- Relación Frente-Espalda 25 dB

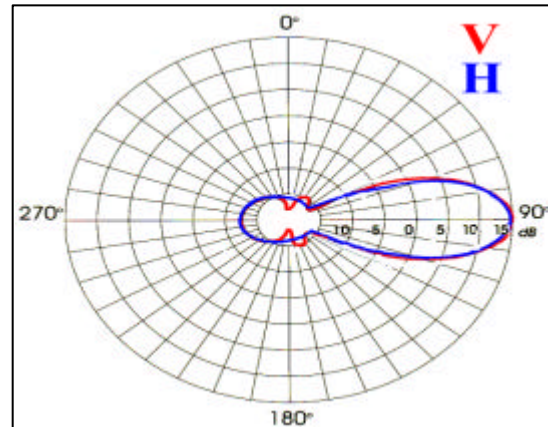

Models	Frequency (MHz)	Gain (dBd)	Length (m)	Bandwidth (MHz)	Weight (kg)	Elements N°.	Price (Euros)
BY150 - 14G	1510-1550	14	1,25	40	2,2	24	See price list
BY160 - 12G	1450-1700	12	0.85	170	0.9	15	See price list
BY160 - 15G	1660-1670	15	1,25	10	2,2	24	See price list
BY180 - 12G	1710-1880	12	0.85	170	0.9	15	See price list
BY180 - 15G	1710-1880	15	1,25	170	2,2	24	See price list